


Specifications

Model UV-Air1500

Electrical	120 VAC 60 Hz
UV Lamp	RL-110/1197T5 Low Pressure UVC
Certification	UV-Air Purification Device CSA 222.2 No. 187-20 & UL 867
Wattage	88 Watts
Ballast	4-BE800-ECO with LED Display Visual / audible lamp-out alarm, operation count
Shipping Size	53 x 11 x 6 inches (135 x 28 x 15,2 cm)
Weight	14 LBS (6,4 kg)
Installation	Wall Mounted
Maintenance	Change UV lamp annually - clean unit occasionally
Coverage Area	Approx. 500 - 625 sq ft / 46.5 - 58 m ² per unit
Designed for larger sized rooms, min. 9 ft / 2,75 m ceiling height	
Not for open concept areas	

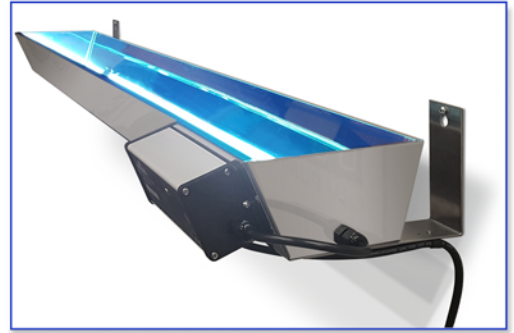


The UV-Air1500 is a very effective method of reducing the viral and bacterial load in the air.


Indoor air can host many pathogens, including viral and bacterial contaminants, and the UV-Air1500 is designed to continually provide effective UV disinfection 24/7 and to reduce the viral load in the air over time.

UV Efficacy against Virus and Bacteria

Germicidal UV light is effective at various distances in air.

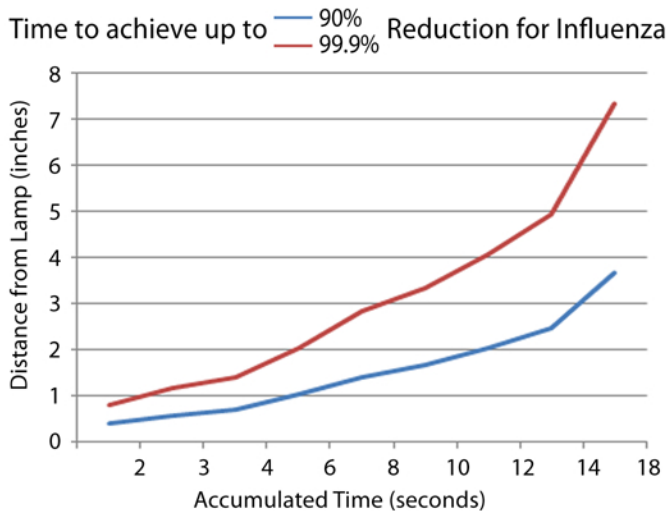

Dimensions

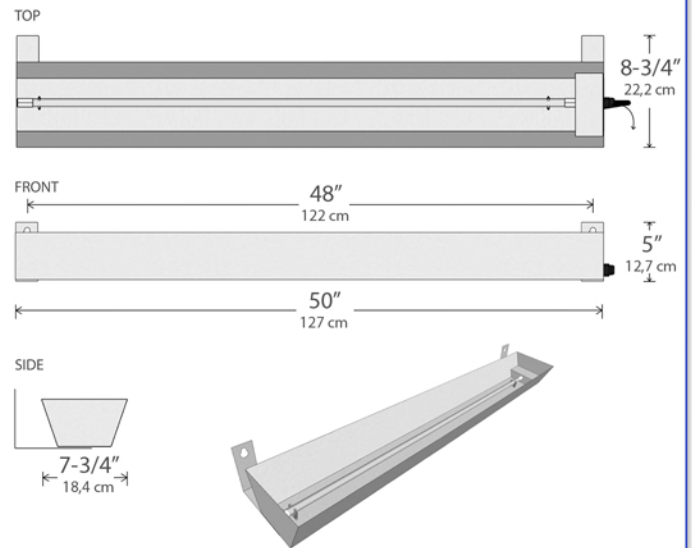

Applications

Use several units when air flow, room size and traffic warrant.

- Health Care Centres, including LTC
- Office and Recreation Areas
- Professional and Medical Offices
- Retirement Homes
- Classrooms
- Restaurants
- Hotels
- Unlimited Applications

